

TECHNICAL DATA Arenaflex elevation



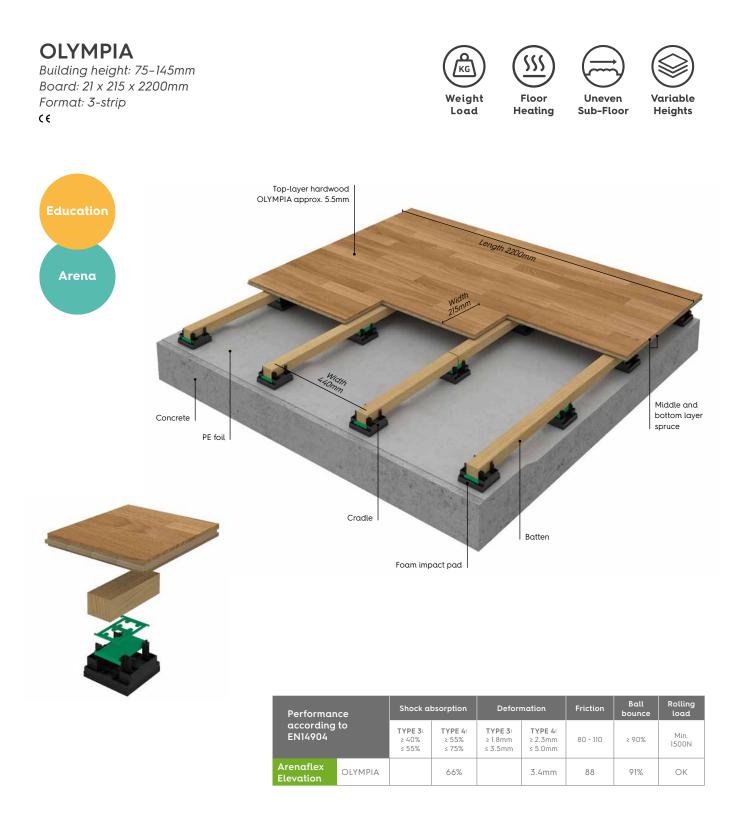

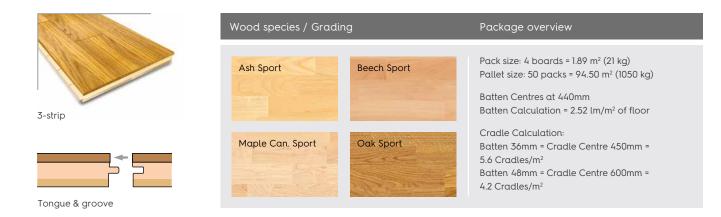

Arenaflex Olympia Construction Details	ails (from the top to the edge of concrete/subfloor)			Height							
Arenaflex Olympia board • Hardwood top-layer 5.5mm • Middle layer and bottom layer spruce	Arenaflex board size: 21 x 215 x 2200mm	21	21	21	21	21	21	21	21	21	
Batten, softwood Batten Centres at 440mm Batten Calculation = 2.52 lm/m ² of floor	Batten dimension: 36 x 45 x 1800mm Batten dimension: 48 x 45 x 1800mm	36	36	36	36	48	48	48	48	48	
Packers (Maximum of 14mm per cradle)	Thickness: 2mm and 6mm									14	
Cradle Polypropylene Flooring support with a 12mm resilient foam pad built in	E1 – Cradle 90 x 90 x 18mm E1 – Cradle 90 x 90 x 32mm E2 – Cradle 90 x 90 x 47mm E2 – Cradle 90 x 90 x 62mm	18	32	47	62	18	32	47	62	62	
PE foil (ordered separately)	Special requirement for new buildings: 2 layers of 0.2mm. It is not a moisture barrier, but gives to the floor an extra protection.	0.4mm									
Minimum construction height		75	89	104	119	87	101	116	131	145	

MAINTENANCE

We recommend starting a regular system of maintenance from day one. The amount of maintenance your floor requires will depend on how you use and treat it. For more information: boensport.com

BOEN Sport flooring is a product of natural materials. Respect for nature is reflected in our processing and management of raw materials. BOEN constantly seeks methods for processing the raw materials in the most gentle and sustainable manner possible.

All raw material used in production is sourced from forest areas that are properly managed with a high degree of regeneration. The goal is to ensure that all our raw material is certified. We invest in sustainable production and guarantee a controlled and certified supply chain.

Read more on boensport.com



